



Минимизация простоя и потери данных с Veeam Cloud Connect

Павел Косарев

Технический консультант, Veeam Software

pavel.kosarev@veeam.com



Знакомство с Veeam


Veeam был основан в 2006.

Veeam Software — это международная компания, штаб-квартира в городе Бар, Швейцария.



Veeam в цифрах

Количество заказчиков

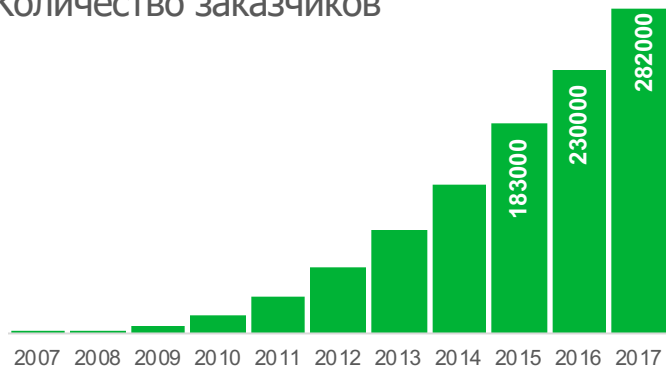

355 000+

заказчиков по всему миру
Более 4000 новых заказчиков
в месяц

18 млн.

защищенных VM
в 180 странах

57%

из списка
Global 2000

82%

из списка
Fortune 500

защищены решениями Veeam

+75

#1 по удовлетворенности заказчиков!
Индекс потребительской лояльности
(Net Promoter Score, NPS)

В 3.5 раза выше среднего по отрасли

Удовлетворенность заказчиков



Возможности решений




Вероятность обновления



Эффективность продаж




Платформа доступности данных

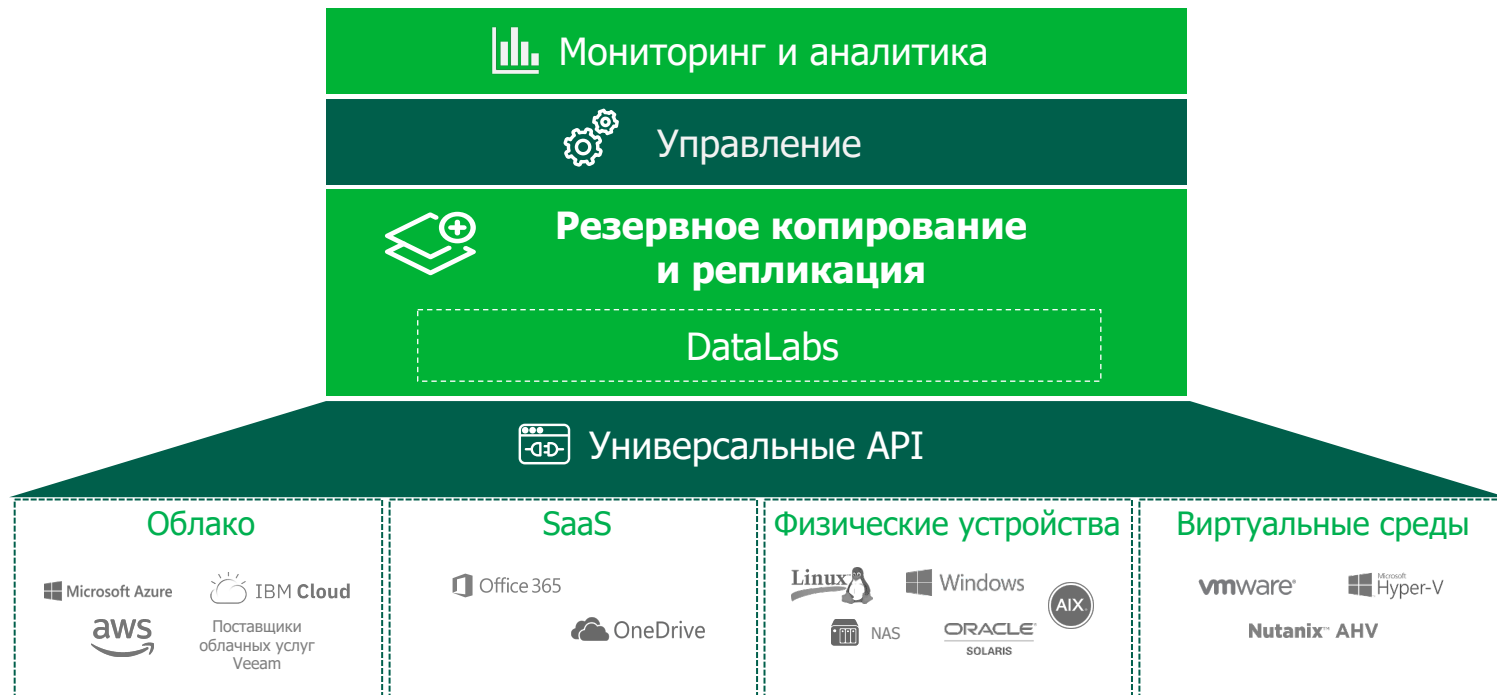


Veeam Backup & Replication

The background features a large, semi-transparent watermark of the Veeam logo, which consists of three interlocking, rounded shapes in a lighter shade of green.

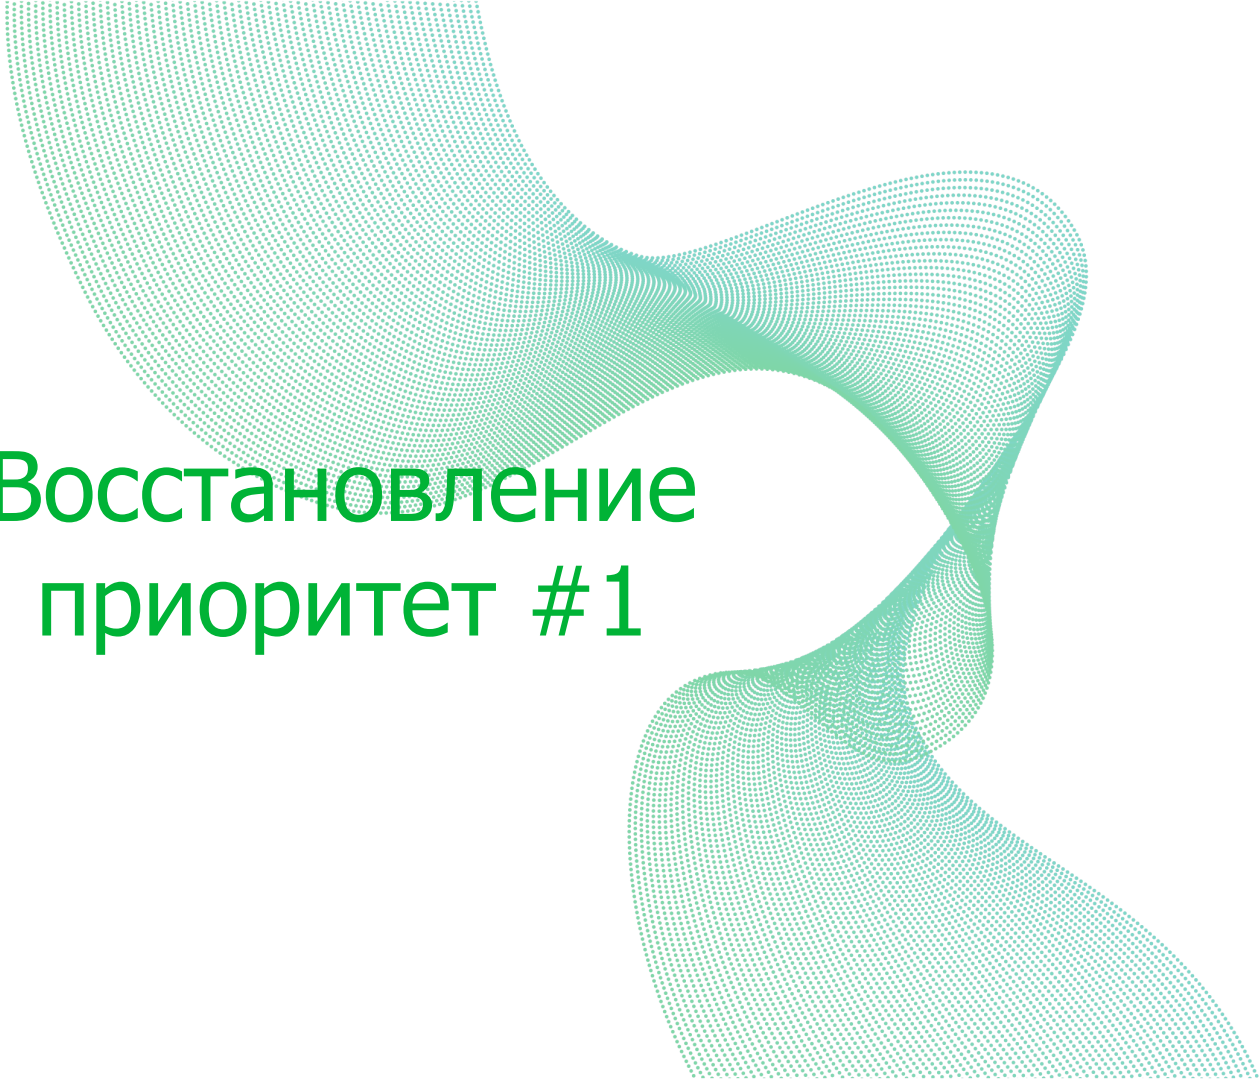An abstract graphic composed of a dense grid of small green dots. The dots are arranged in a way that creates a sense of depth and movement, forming a shape that resembles a stylized, flowing ribbon or a complex, organic form. The color transitions from a light, pale green to a slightly darker, more vibrant green towards the center and right side of the graphic.

Восстановление
приоритет #1

Более 60 вариантов восстановления

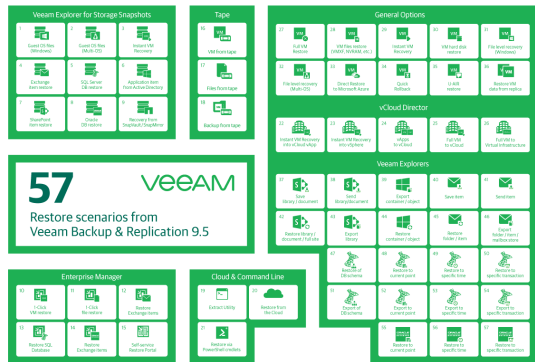





8 Restore of Oracle Database new in 9.5

Authorized personnel can use Veeam Backup Enterprise Manager to restore the necessary databases from Oracle Server VM backups. The restore procedure goes in this way:

1. The user logs in to Veeam Backup Enterprise Manager, using an account with the sufficient permissions.
2. Then, the user navigates to the Items tab and clicks Oracle Databases.
3. The user enters the name of the Oracle server hosting the desired database, or clicks the link to pick server from the list of available Oracle server VM backups.
4. The user selects Oracle home and the desired database.

Note: User credentials for carrying out the restore procedure via Enterprise Manager will be picked as follows: Firstly, Veeam tries to use the account of the backup job that contains Oracle server VM, or the account which is currently logged in; if this fails, the user will be prompted to enter the credentials with sufficient rights.

5. Now two different restore scenarios can be performed according to what is needed: 1-click restore to the original location or restore with custom settings

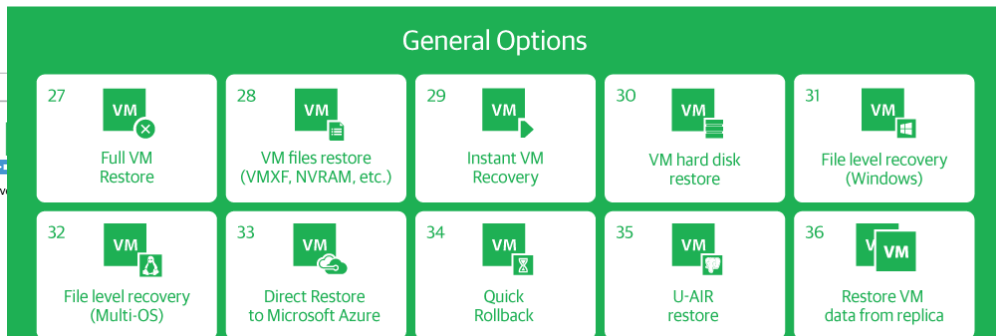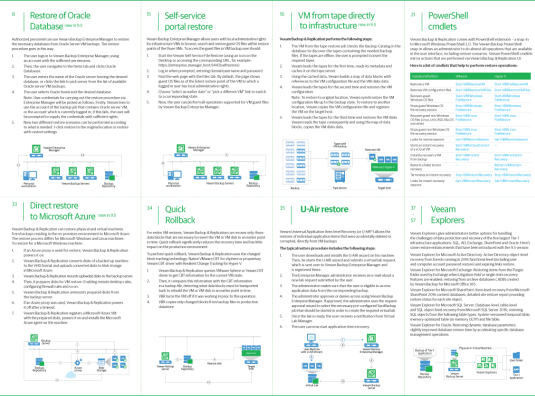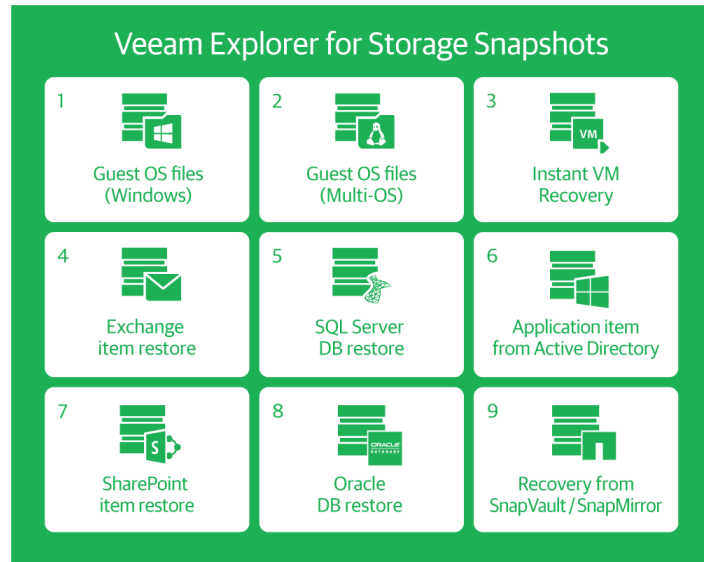


Подробнее по [ссылке](#).

Бэкап Шрёдингера




Состояние любого бэкапа остается неизвестным до того, как его попробуют ВОССТАНОВИТЬ

Гарантированная защита - SureBackup

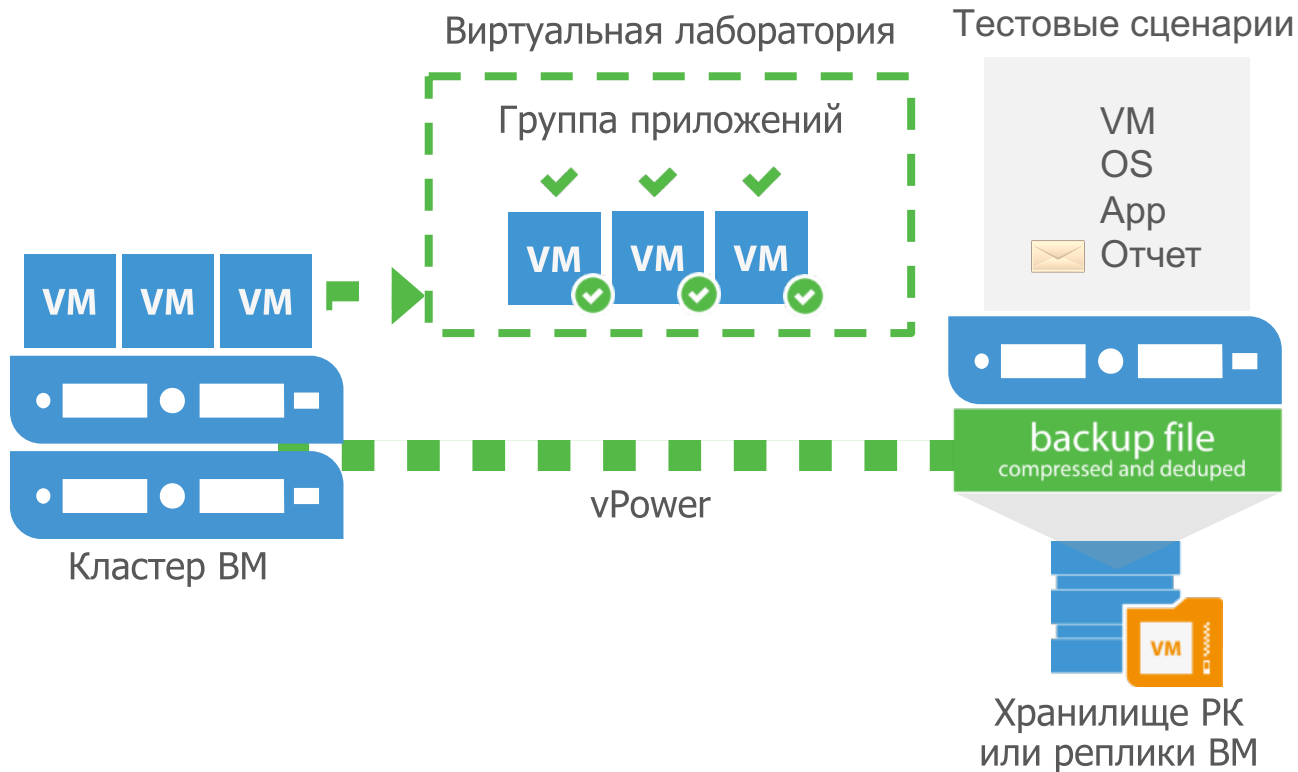


Тестовая среда по запросу

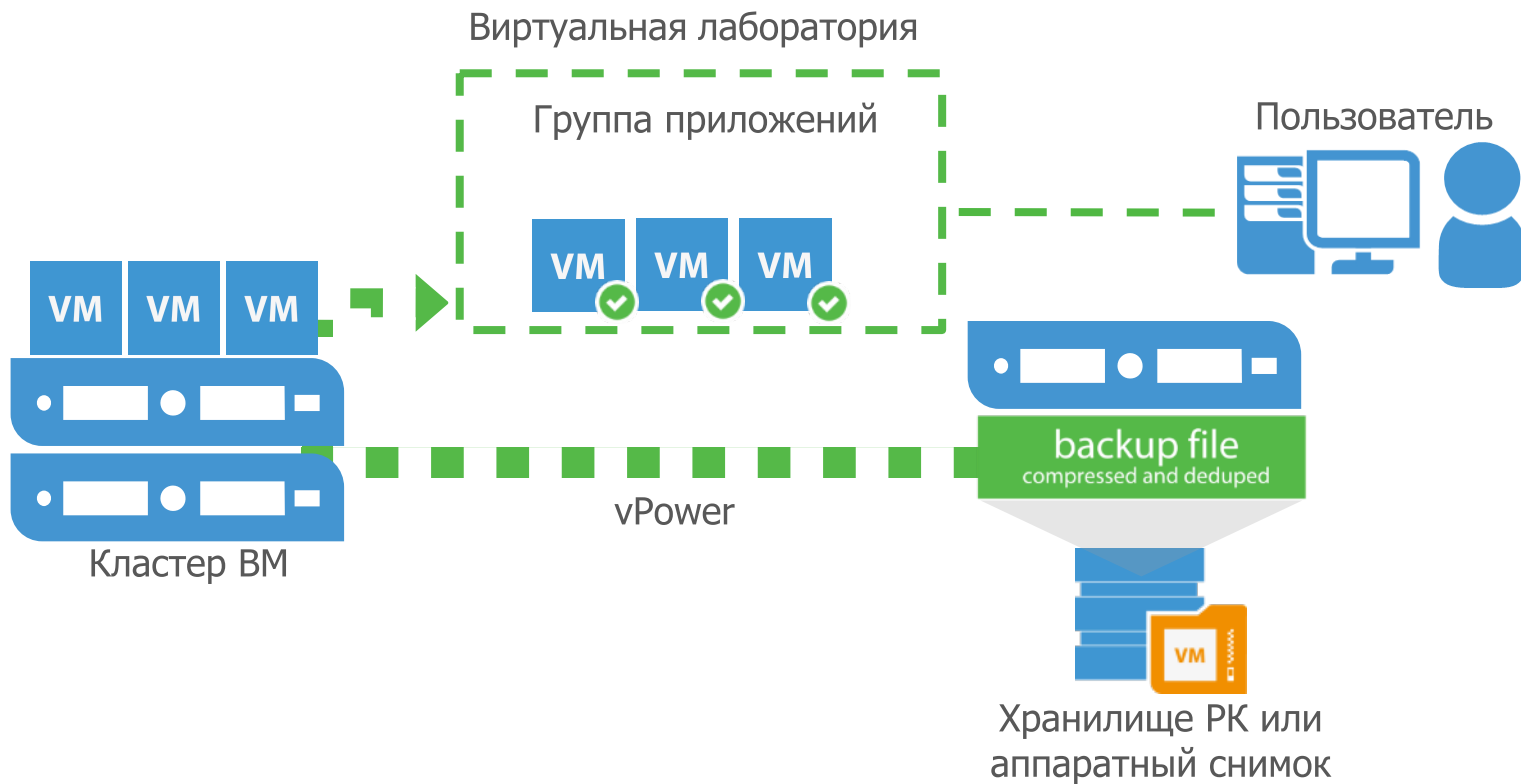

Безопасное восстановление


Позволяет восстанавливать данные без рисков "нулевого дня"

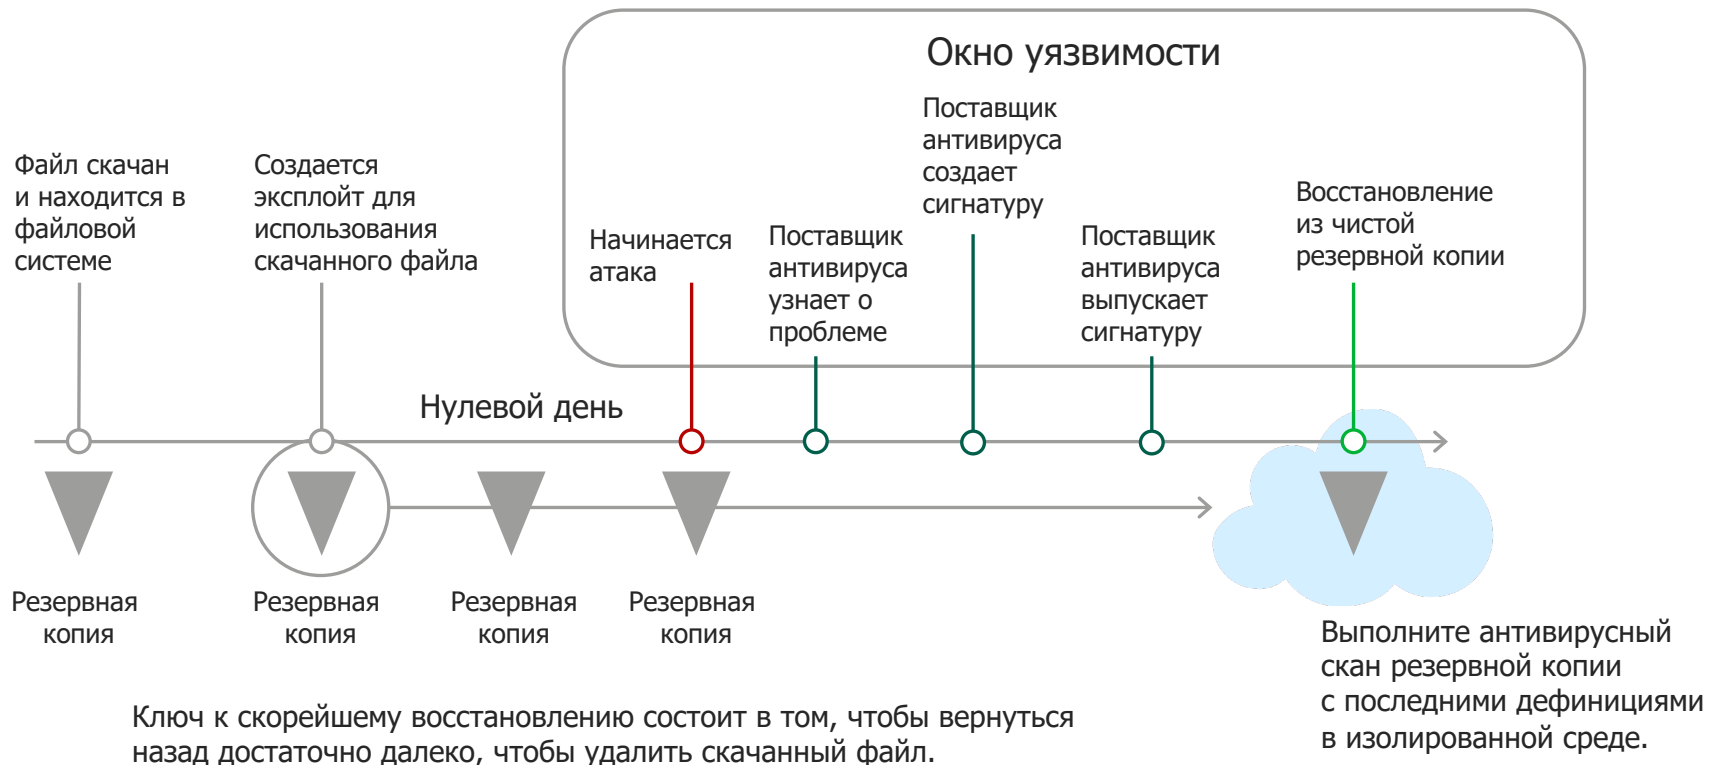

Централизованное управление

Полный контроль и прозрачность рабочих нагрузок на базе vSphere, Hyper-V, Linux и Windows через консоль **Veeam Backup & Replication**.

Простое управление заданиями резервного копирования и восстановления данных виртуальной и физической среды, независимо от их местонахождения, с помощью **единой КОНСОЛИ**.

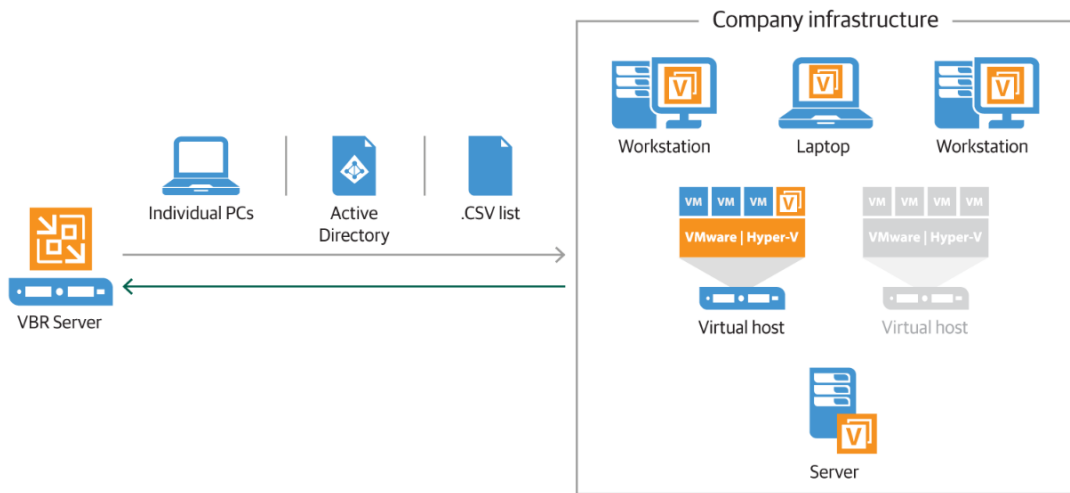

Правило 3-2-1

3

Экземпляра
данных



2

Разных типа
носителей



1

Копия off site




0

ошибок




Правило 3-2-1

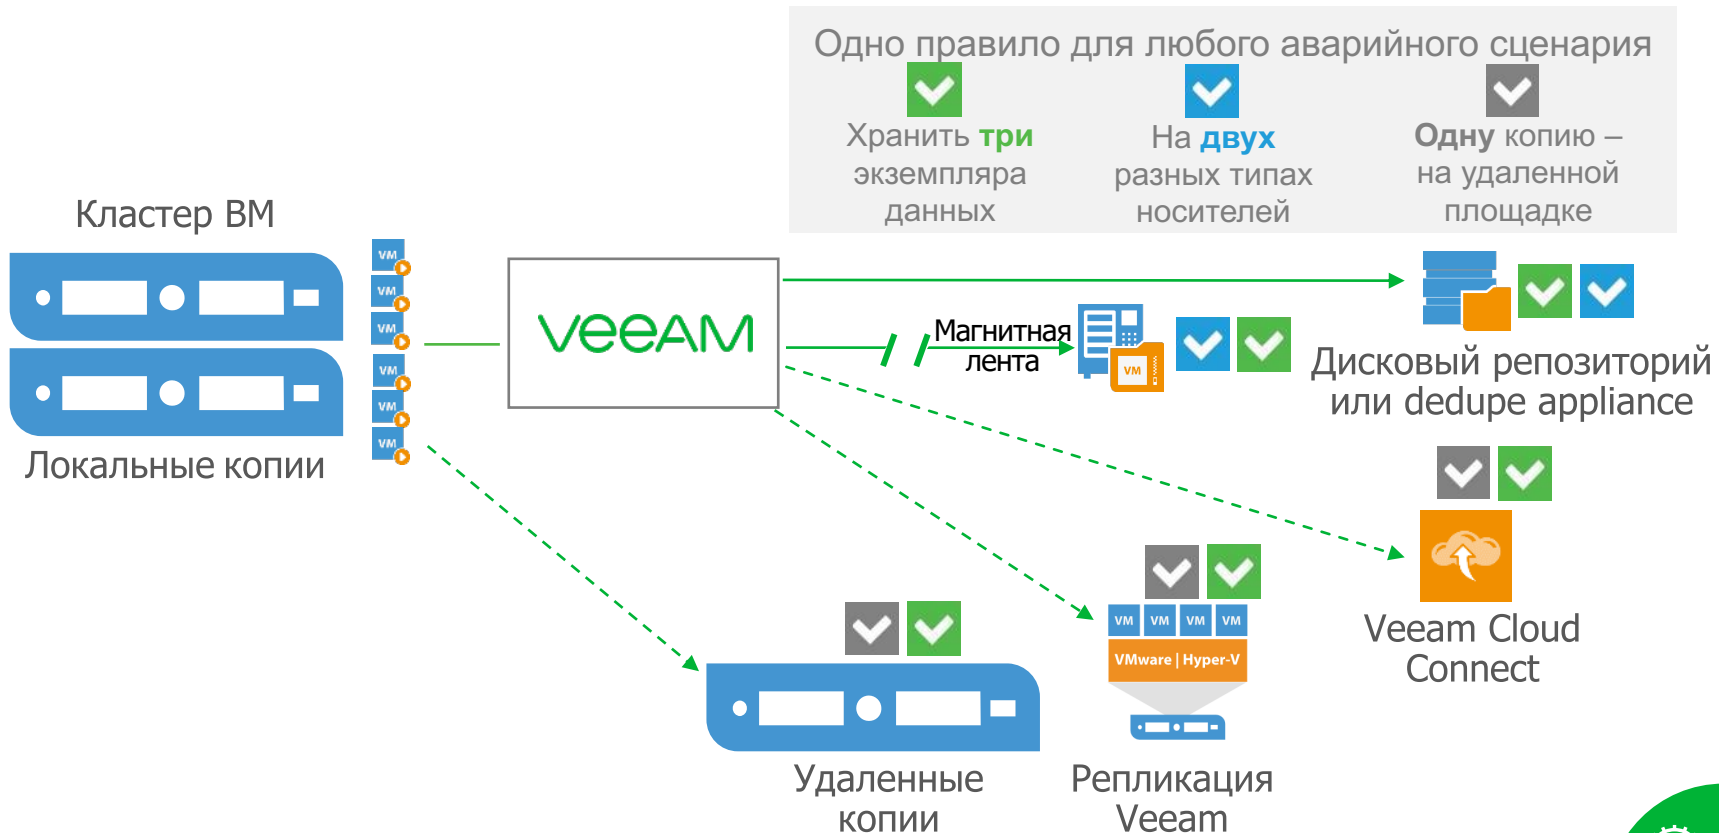


Veeam Cloud Connect

Технология Veeam Cloud Connect позволяет поставщикам услуг развернуть безопасную многопользовательскую платформу для хранения резервных копий Veeam и реплик виртуальных машин (VM).

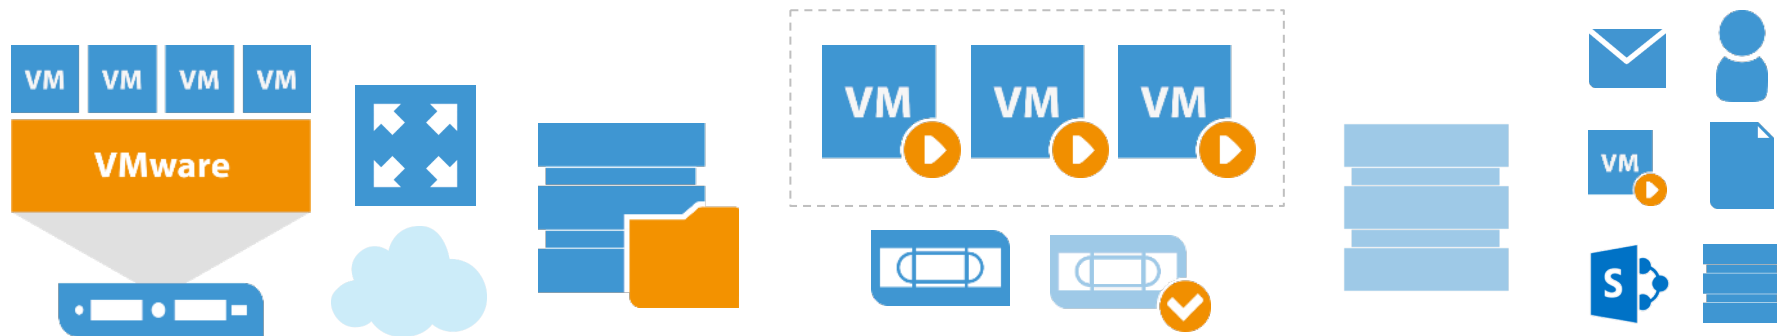

Добавить провайдера

Service Provider ✕


 **Service Provider**
Type in DNS name or IP address and a port number received from the service provider. If you are using more than one service provider, add a custom description to more easily distinguish between them.

Service Provider	DNS name or IP address: <input type="text" value="veeam-cconnect.veeam.demo"/>
Credentials	Description: <input type="text" value="Created by VEEAMLAB\labuser20 at 12/3/2018 2:46 PM."/>
Apply	Port: <input type="text" value="6180"/>
Summary	<input type="checkbox"/> Allow this Veeam Backup & Replication installation to be managed by the service provider Select this check box if you have managed backup contract with the service provider you are adding, and want to allow it to manage your installation remotely.

< Previous **Next >** Finish Cancel

Авторизация

Service Provider ✕


 **Credentials**
Specify credentials that you have received from the service provider, and validate the certificate.


Service Provider

Credentials

Apply


Summary

 Service provider veeam-cconnect.veeam.demo uses untrusted or self-signed certificate.
Verified by: [CN=Veeam Demo CA, DC=veeam, DC=demo](#)
Thumbprint:

 Add or select credentials issued to you by the service provider
Credentials:
[Manage accounts](#)

Арендованные ресурсы

Service Provider ✕

 **Resources**
The following are cloud backup repositories your service provider has assigned to you.

Service Provider

Credentials

Resources

Apply

Summary


Available cloud repositories:


Repository	Capacity	WAN Acceleration
Cloud Repository Labuser20	30.0 GB	Enabled

< Previous **Apply** Finish Cancel

Проверка и выбор репозитория


Edit Backup Job [Backup Job Linux] ✕

 **Storage**
Specify processing proxy server to be used for source data retrieval, backup repository to store the backup files produced by this job and customize advanced job settings if required.

Name	Backup proxy:
Virtual Machines	Automatic selection Choose...
Storage	Backup repository:
Guest Processing	Cloud Repository Labuser20 (Cloud repository) ▼
Schedule	 30.0 GB free of 30.0 GB Map backup
Summary	Retention policy
	Restore points to keep on disk: <input type="text" value="3"/> ▲▼
	<input type="checkbox"/> Configure secondary destinations for this job
	Copy backups produced by this job to another backup repository, or to tape. Best practices recommend maintaining at least 2 backups of production data, with one of them being off-site.
	Advanced job settings include backup mode, compression and deduplication, block size, notification settings, automated post-job activity and other settings. ⚙️ Advanced


< Previous Next > Finish Cancel

Резервное копирование в облако

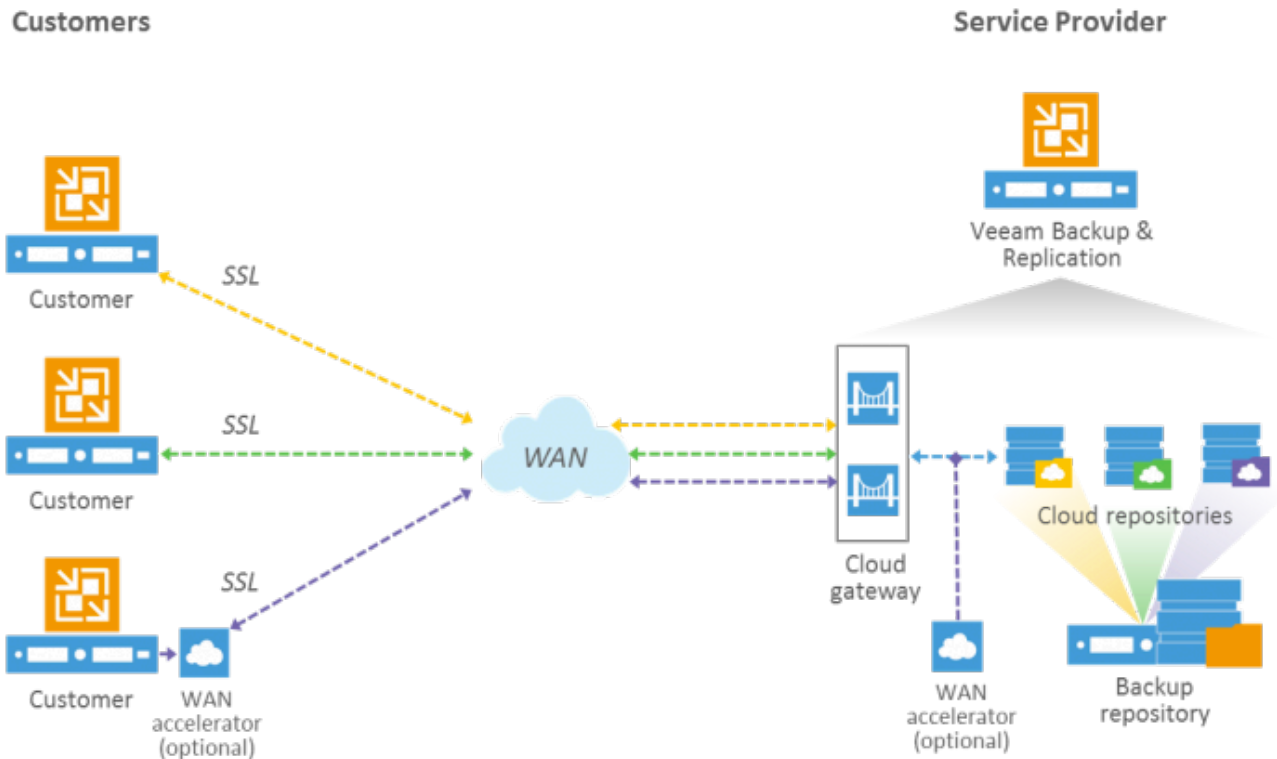


Восстановление в облако

- Обычная репликация Veeam
- Целевое устройство заданий репликации — облачный хост
- Планы оборудования определяют необходимые ресурсы

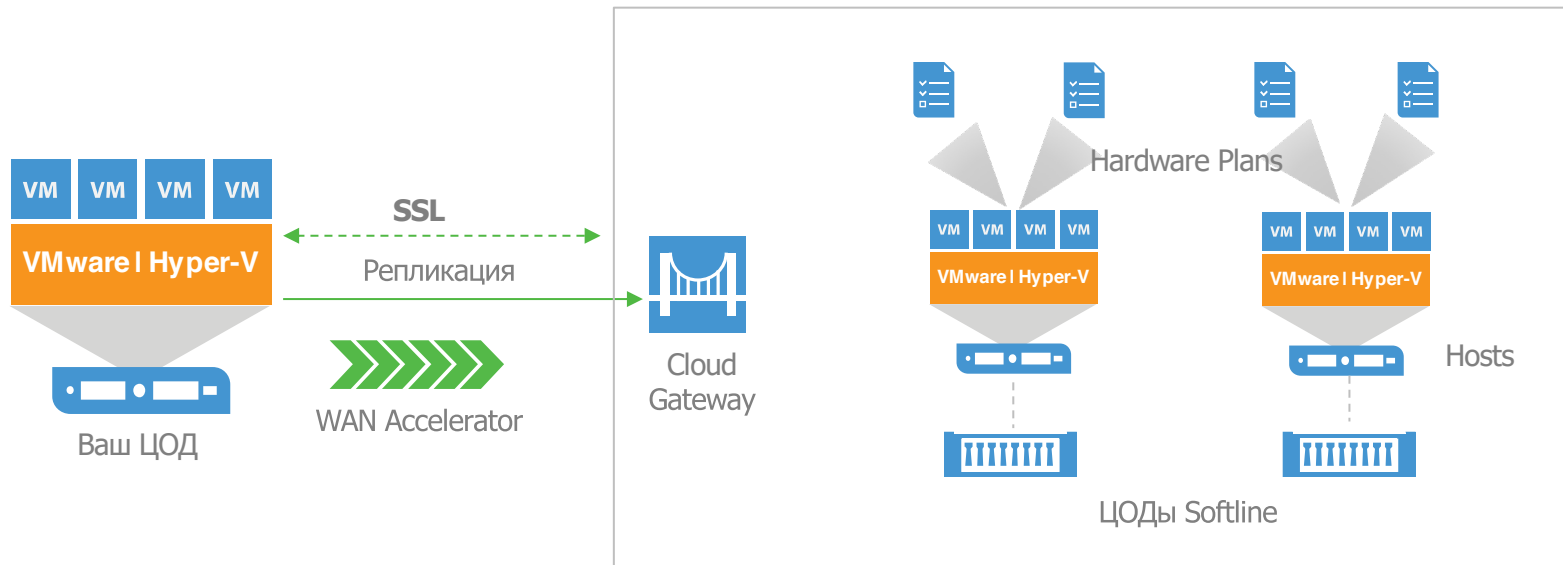


Сетевое расширение

- Интегрированное: устанавливается и управляется через консоль
- Простое подключение к облачному шлюзу (один порт)
- Поддерживает частичное переключение между площадками
- Поддерживает тестирование переключения

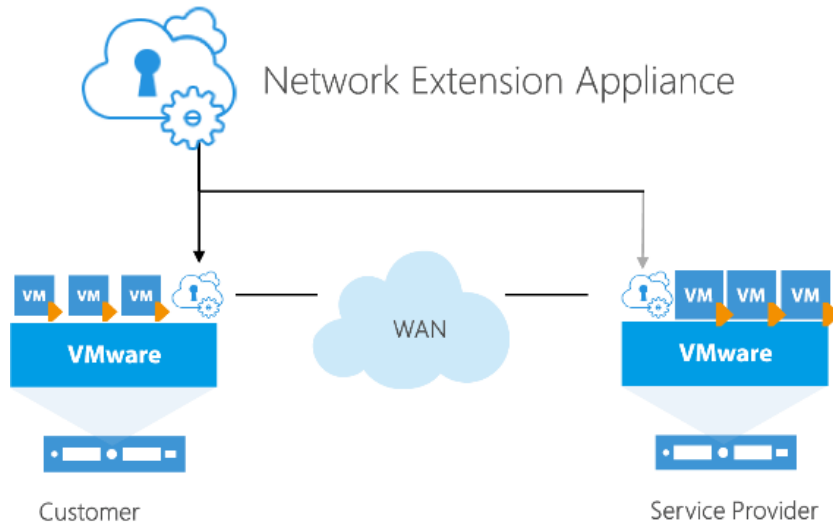


Портал самообслуживания

- Переключение в один клик с помощью предварительно протестированных планов
- Восстановление сервисов и приложений на DR площадке

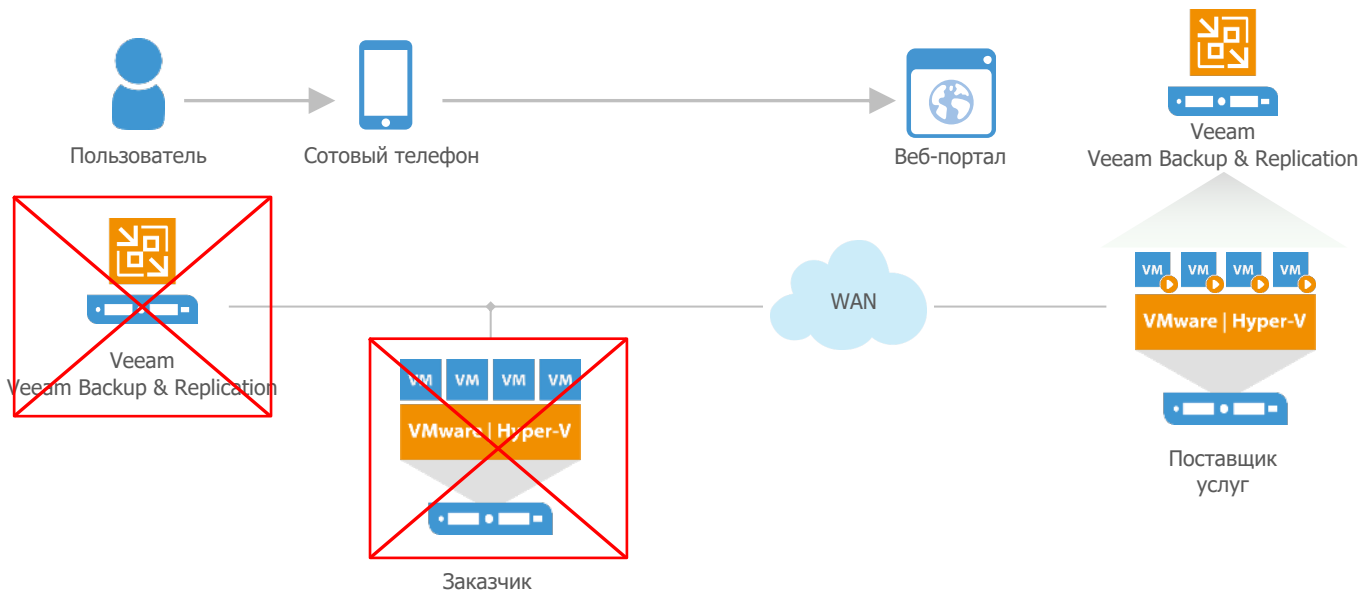

Veeam Backup для Microsoft Office 365

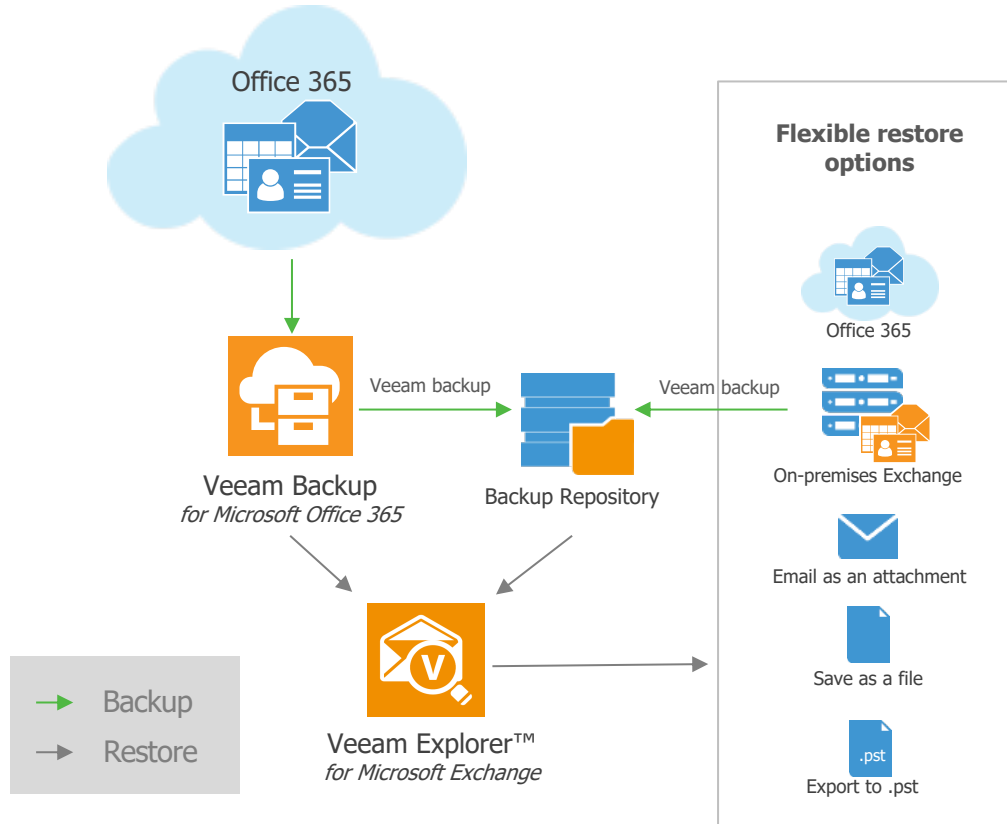

Ресурсы, которыми нужно пользоваться сейчас

Veeam Backup & Replication:

<https://www.veeam.com/vm-backup-recovery-replication-software.html>

Veeam Backup & Replication Community Edition:

<https://www.veeam.com/virtual-machine-backup-solution-free.html>

Veeam Backup for Microsoft Office 365:

<https://www.veeam.com/backup-microsoft-office-365.html>

Veeam ONE:

<https://www.veeam.com/virtualization-management-one-solution.html>



Спасибо!

VEEAM